


Mast Mounting Kit (Part # M-MKA)

Items included

| ✓ | Quantity | Item |
|---|----------|-----------------|
| | 1 | Mounting Plate |
| | 2 | U-Bolt Assembly |
| | 4 | 6x38 Screw |

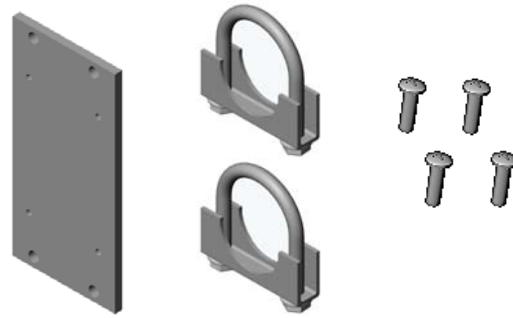

Assembly instructions

Use the Mast Mounting Kit to mount the HOBOb[®] Micro Station logger or a HOBOnode Repeater to a 4.1 cm (1 5/8 inch) diameter mast, such as the optional 1.5 m mast (Part # M-MPB), or 2 m tripod (Part # M-TPB) and 3 m tripod (Part # M-TPA).

Specifications:


Weight: 0.45 kg (1 lb); Dimensions: 19 x 9 x 8 cm (7.5 x 3.5 x 3 inches)

Tools required:

- 1/2 inch wrench
- Phillips-head screwdriver

To mount the unit:

1. Unscrew the clear cover on the logger (illustration below shows a Micro Station).
2. Place the four screws provided in this kit through each of the four holes next to the screw holes used to attach the clear cover. Screw in the four screws through the inside of the case to the mounting plate.
3. Using the two 1-5/8 inch U-bolt assemblies and the mounting plate, mount the logger upright to the mast. Place the U-bolts around the mast and install the saddle clamps. Place the logger mounting plate against the saddle clamps and screw on the U-bolt hex nuts.
4. Screw the cover back on the logger when done.

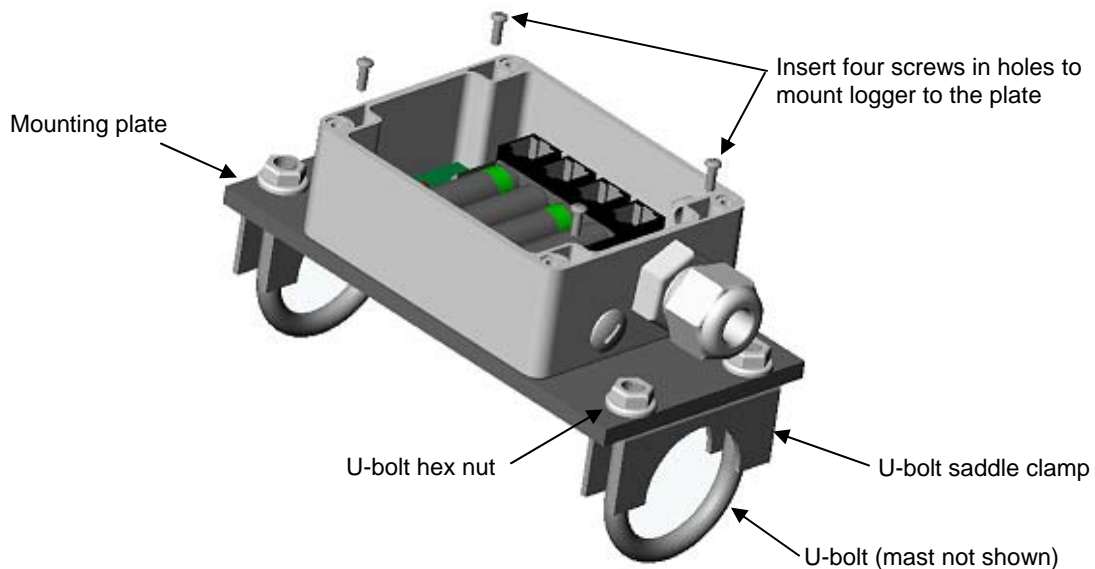

Refer to the *HOBOb Micro Station User's Guide* for additional Micro Station setup information. For support with this product, contact the place of purchase: Onset Computer Corporation at 1-800-LOGGERS (1-800-564-4377) or an Authorized Onset Dealer. See also onsetcomp.com or hobohelp.com.