


CABLE-4-20MA

4 to 20 mA Input

For use with U and Z series Data Loggers

For connecting a sensor with a 4-20mA output to a HOBO U12, UX120, or ZW series external-channel data logger.

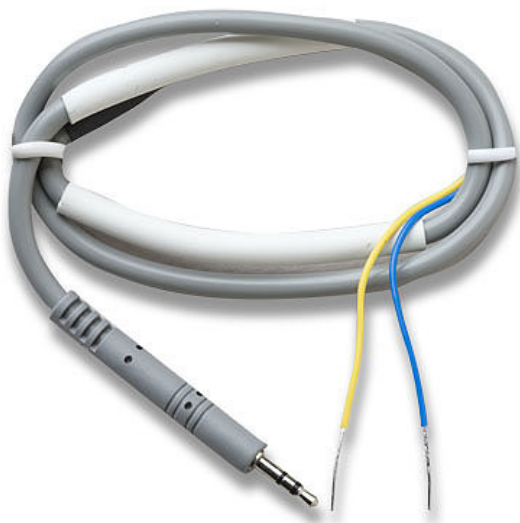

Features

- 18.5 inches in length
- Can be plugged directly into the external input jacks of U12, UX120, or ZW series loggers to expand the range of measurement options and applications.

Contact Us

Sales (8am to 5pm ET, Monday through Friday)

- Email sales@onsetcomp.com
- Call 1-508-759-9500
- In U.S. toll free 1-800-564-4377
- Fax 1-508-759-9100

Technical Support (8am to 5pm ET, Monday through Friday)

- Contact Product Support www.onsetcomp.com/support/contact
- Call 1-508-759-9500
- In U.S. toll free 1-877-564-4377

Onset Computer Corporation
470 MacArthur Boulevard
Bourne, MA 02532

4 to 20 mA Input (CABLE-4-20MA) Specifications

Measurement range: 0 to 20.1 mA

Accuracy with U12: ± 0.02 mA $\pm 2.5\%$ of absolute current

Accuracy with ZW: ± 0.015 mA $\pm 2.0\%$ of absolute current

Accuracy with UX120-006M, MX1104, and MX1105: ± 0.001 mA $\pm 0.2\%$ of absolute current

Resolution with U12 and ZW: 0.03% of full scale

Resolution with UX120-006M, MX1104, and MX1105: 0.002% of full scale

Cable length: 47 cm (18.5 inches)