


## RX3000 Station Key Components

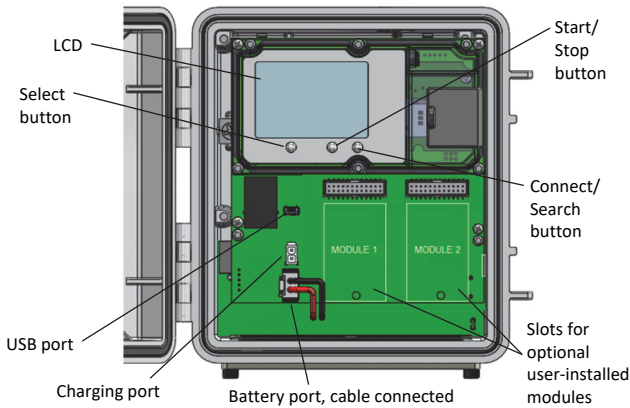

### 1 Log in to HOBOLink.

Go to [www.hobolink.com](http://www.hobolink.com) and log in to an existing account or create a new one. You'll receive an email to activate the new account.

### 2 Register the station.

In HOBOLink, click Devices and then click the Register a Device link. Give the station a name and enter the serial number and device key from the label inside the station door.


### 3 Plug in the battery and solar panel.

Connect the battery cable to the battery port followed by the solar panel cable to the charging port. Once the battery cable is plugged in, "Initializing System" will flash on the LCD. A checkmark appears next to "System" after the system initialization is complete.

**Tip:** Refer to the RX3000 manual for instructions on wire routing and environmental sealing of wires.


### 4 Check or configure device communications.

The station will automatically connect to HOBOLink after powering up the station. Make sure a checkmark appears next to Last Connection. If not, press the Connect button and wait for the station to connect to HOBOLink.

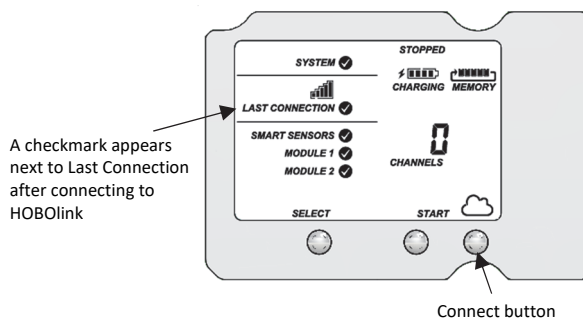


### 5 Plug in and search for smart sensors.

- a. Plug in smart sensors into the connectors in the bottom of the case.

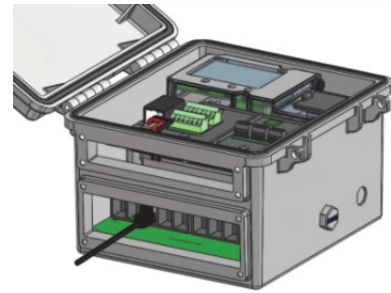

**Tip:** Refer to the RX3000 manual for instructions on wire routing and environmental sealing of wires.

- b. Press the Select button to view the smart sensors on the LCD and then press the Search button (the magnifying glass icon should be visible as in the example below). The station will search for all connected smart sensors and show the number of channels after a few seconds. Note that some smart sensors have multiple channels (such as the temperature/RH sensors).

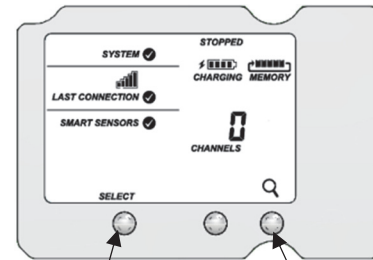


Press the Select button to view the smart sensor channels

Press the Search button for the station to identify connected smart sensors

### 6 Connect to HOBOLink.


Use the Select button to return to the main LCD screen that shows all sensors and modules and then press the Connect button (the cloud icon should be visible as shown in the example). This is necessary for HOBOLink to identify the newly added sensors.

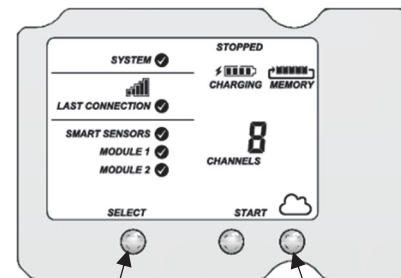

Press the Select button to return to the main LCD screen

Press the Connect button

## 7 Configure the station in HOBOLink.

Go to Devices > List and click the  icon next to your station. Make changes and click Next to move through the Configuration Assistant to configure the following:


- System settings and connection interval.
- Smart sensor logging interval and sampling interval.
- Settings for each smart sensor (labels, graph, and scaling).

Any configuration changes will be transferred to the station the next time it connects with HOBOLink.

## 8 Start logging.

Press the Start button on the station to start logging; the station will connect to HOBOLink.

## Checking the Station in HOBOLink

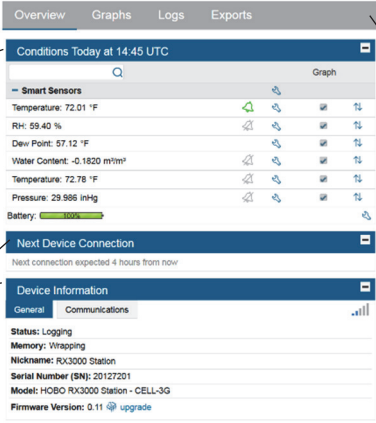

The screenshot shows the HOBOLink interface with three main sections: 'Conditions Today at 14:45 UTC', 'Next Device Connection', and 'Device Information'. The 'Conditions Today' section lists smart sensors with their current readings: Temperature (72.01 °F), RH (59.40 %), Dew Point (57.12 °F), Water Content (-0.1820 m/m), and Pressure (29.986 inHg). The 'Next Device Connection' section indicates the next connection is expected in 4 hours. The 'Device Information' section shows details like Status (Logging), Memory (Wrapping), Nickname (RX3000 Station), Serial Number (20127201), Model (HOBOLink RX3000 Station - CELL-3G), and Firmware Version (0.11).

View smart sensor readings, module information, and alarm status from the last connection

Click Devices, then List, and then click the station name to view this device overview page. From here, you can view graphs of sensor data, logs, and exports associated with the station.

Check the next scheduled connection and details about the station



For additional information, see the *HOBOLink RX3000 Remote Monitoring Station User's Manual* for specifications and detailed operation, including deployment guidelines, mounting instructions, and steps for installing the weatherproof rubber cable channels. Go to [www.onsetcomp.com/resources/documentation/18255-rx3000-manual](http://www.onsetcomp.com/resources/documentation/18255-rx3000-manual) or scan the code at the left.